



Low-Profile Strain Relief Cord Connectors

Non-metallic. Liquid-tight • Oil-tight. Furnished with sealing ring and locknut.



CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	TRADE SIZE	CORD RANGE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
LPCG503*	50350	1/2	.100-.300	25	100	1.792	.630	1.042
LPCG50W	32875	1/2	.200-.472	25	100	1.792	.630	1.042
LPCG50**	80086	1/2	.200-.472	25	100	1.792	.630	1.042
LPCG507	50354	1/2	.385-.750	25	100	2.178	.517	1.305
LPCG753*	50760	3/4	.100-.300	10	50	1.963	.570	1.042
LPCG754	50762	3/4	.240-.472	10	50	1.963	.570	1.305
LPCG757	36100	3/4	.385-.750	10	50	2.250	.600	1.305
50LPCGBAG†	55080	1/2	.100-.472	-	500	1.792	.630	1.042
75LPCGBAG†	55082	3/4	.100-.472	-	100	1.963	.570	1.305

*LPCG503 and LPCG753: UL not applicable for .100 - .240 wire diameter----wire strength will not meet UL's 35 lb. pullout test requirement for the fitting.



**LPCG50: UL not applicable for .200 to .240 wire diameter----wire strength will not meet UL's 35 lb. test requirement for the fitting.

†Includes UF grommet 14/2 to 12/2. Bags not available in black.

When ordering in black, add suffix "BL" to catalog #.

When ordering in white, add suffix "W" to catalog #.

PATENTED.

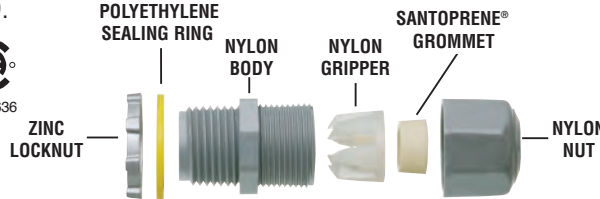

Arlington's Low Profile Cord Connector has a unique grommet with gripping fingers. These connectors have the largest cord range in the industry — so there are fewer items to stock. A liquid-tight seal and superior pullout resistance is accomplished by just tightening the nut. A sealing ring is furnished to assure a liquid-tight seal when installing in non-threaded openings.

Low-Profile Strain Relief Cord Connectors

Zinc die-cast. Liquid-tight • Oil-tight. Furnished with sealing ring and locknut.





CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	TRADE SIZE	CORD RANGE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
LPCG503Z*	50352	1/2	.100-.300	25	100	1.792	.630	1.042
LPCG50Z**	36110	1/2	.200-.472	25	100	1.792	.630	1.042
LPCG507Z	50356	1/2	.385-.750	25	100	2.178	.517	1.305
LPCG753Z*	36105	3/4	.100-.300	10	50	1.963	.570	1.042
LPCG754Z	50764	3/4	.240-.472	10	50	1.963	.570	1.305
LPCG757Z	50766	3/4	.385-.750	10	50	2.250	.600	1.305

*LPCG503Z and LPCG753Z: UL not applicable for .100 - .240 wire diameter----wire strength will not meet UL's 35 lb. pullout test requirement for the fitting.

**LPCG50Z: UL not applicable for .200 to .240 wire diameter----wire strength will not meet UL's 35 lb. test requirement for the fitting.

PATENTED.

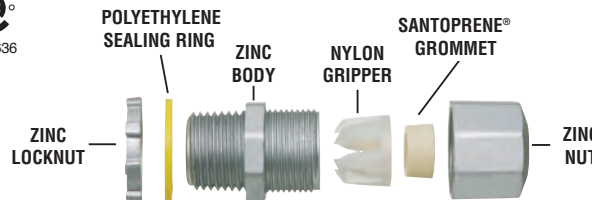




Strain Relief Cord Connectors

Liquid-tight • Oil-tight.
Furnished with sealing ring.
Zinc die-cast.



CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	TRADE SIZE	CORD RANGE	STD PKG	DIM A	DIM B	DIM C	GROMMET COLOR
CG100750	30750	1	.625-.750	5	2.125	.650	1.370	ORANGE
CG100875	30875	1	.750-.875	5	2.150	.750	1.370	BLACK
CG1001000	31000	1	.875-1.000	5	2.150	.772	1.370	PURPLE

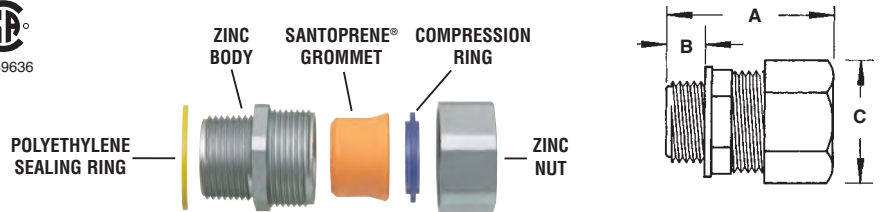


Colorgrip® Strain Relief Cord Connector

Non-metallic • Liquid-tight • Oil-tight. Furnished with sealing ring and locknut.



CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	TRADE SIZE	CORD RANGE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	GROMMET COLOR
NMCG100750	55000	1	.625-.750	5	30	1.800	.688	1.931	ORANGE
NMCG100875	55002	1	.750-.875	5	30	1.839	.671	1.931	BLACK

When ordering in black, add suffix "BL" to Catalog #.

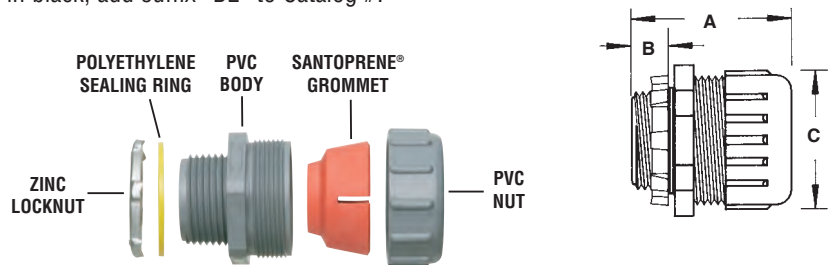

Cable Chart for Arlington Cord Grip Fittings

Check outside wire diameter or manufacturer's specifications for dimensions.

CABLE RANGE	COMMUNICATION & CONTROL WIRE	SJ & SJO	S & SO	SJTO	STO
.100 to .200	22-2 to 14-1 14-1 12-1				
.200 to .300	22-2 20-2 to 20-4 18-2 18-3	18-2 18-3 16-2 16-4	18-2 18-3	18-2 18-3 16-2 16-4	18-2 18-3 16-2 16-2
.300 to .385		16-3		16-3 14-2	
.385 to .472		16-4 14-2 to 14-4 12-2 12-3	16-2 to 16-4 14-2	16-4 14-3 14-4 12-3 12-4	18-4 16-3 14-2

CABLE RANGE	SJ & SJO	S & SO	SJTO	STO
.472 to .625	12-4 10-2 to 10-4	14-3 14-4 12-2 to 12-4 10-3 8-2	10-2 to 10-4	14-3 14-4 12-2 to 12-4 10-2 10-3
.625 to .750	10-4	12-4 10-2 to 10-4 8-2 8-3	10-4	12-4 10-2 to 10-4
.750 to .875		8-4 8-5 6-2 6-3		
.875 to 1.000		6-4 4-2 4-3		6-4 4-3